


2 Panel Smooth

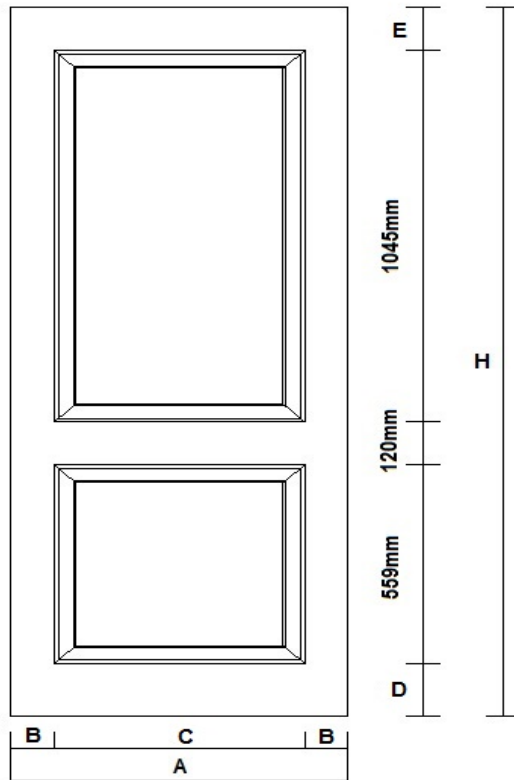

Technical Specifications

Specific gravity	900 Kg/m ³ average
Moisture content	average 5% to 8%, no point lower than 4%
Thickness	minimum thickness, skin to skin 2.75mm maximum thickness, skin to skin 3.4mm maximum variation on one skin 0.4mm
Bending strength	23N/mm ² minimum (EN 310)
Internal bond	0.65 N/mm ² minimum (EN319)
Flatness	maximum distortion 39mm
Formaldehyde release	Conforms to Phase 2, according to the test Chamber method ASTM D 6007 and modified desiccator method ASTM D 5582
Tolerance for Dimensions: +/- 2mm	

Dimensions

A	B	C	D	E	H
772	149.5 or 99.5	473 or 573	204	122	2050
822	124.5	573			
873	150	573			
995	161	673			

