


CERTIFICATE No CF 437 PYROGUARD UK LIMITED

Pyroguard EI60 INT or Pyroguard EI60 EXT glass in timber framed screens for periods of 60 minutes integrity and insulation

For this application the following conditions shall apply:

The glass shall be glazed utilising the following basic specification:

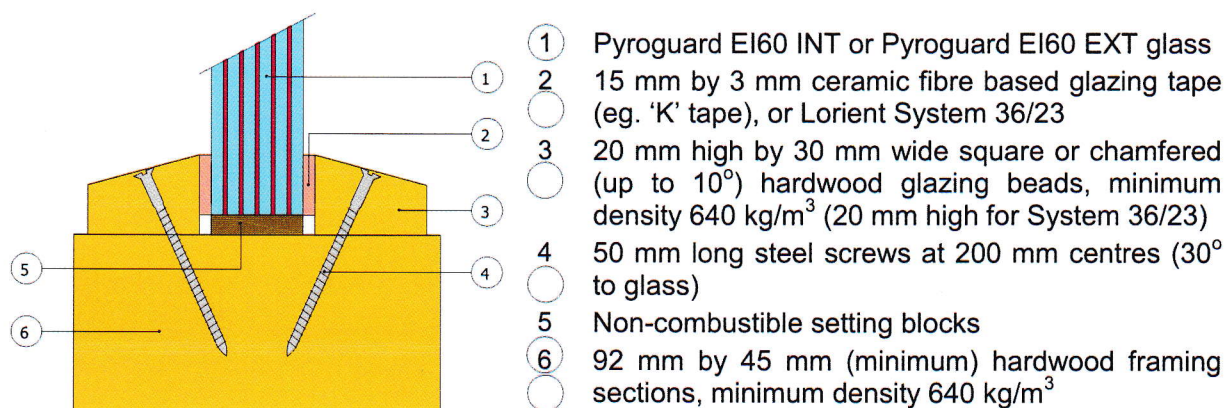

This Certificate of Approval relates to the sizes of Pyroguard EI60 INT or Pyroguard EI60 EXT glass shown in Figure 18 below, when used in conjunction with the above system. The aspect ratio of the glass may be unlimited within these aperture dimensions.

