



Ireland's Leading Manufacturer
of Doors and Pre-hung Door Sets

Over 50 years Carroll Joinery has established itself as Ireland's leading manufacturer and supplier of doors and doorsets. Our 90,000 sq ft purpose-built factory is based near Callan, Co Kilkenny and our sales office is in Bluebell, Dublin. We supply Ireland's leading builders of residential and commercial buildings, with reliable quality and a superior service.

At our factory in Kilkenny, we have been manufacturing doors and windows since 1965. We have the latest equipment to make doors of a wide range of styles to the highest quality standards. We have the latest machinery to provide those doors pre-hung in frames making it very convenient and economical for the modern builder. We design the doors, we manufacture the doors, we sell the doors, and we stand behind the doors!



Contents



Lineal Doors	2
Moulded Panel Doors.....	6
Designer Doors.....	8
Shaker Doors	10
Flush Doors	12
Veneer Doors.....	14
Handles Collection	16
Stairs	17
Mouldings	19
Fire	20





Our Lineal Range of doors is crafted at our factory in Ballintaggart, Co Kilkenny. These are stylish contemporary door designs, where simplicity paves the way for fresh ideas with the use of v-groove lines in our flush doors.

Lineal Doors

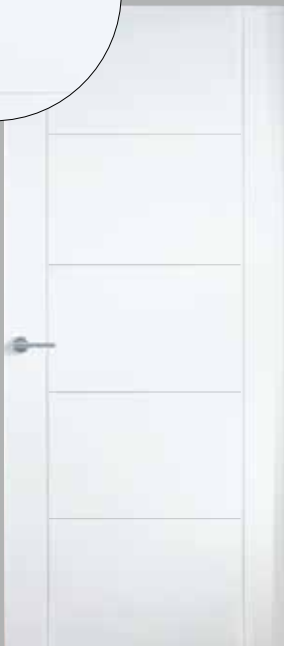

Quebec



Calgary



Kinvara



Torquay



Cavan



Dungarvan



Youghal



Vancouver





Our collection of contemporary doors are crafted with grooves and selected veneers at our factory in Ballintaggart, Co Kilkenny. These doors are suited to the more discerning customer seeking a high quality veneered door.

Lineal Doors



Ballina



Cashel



Westport



Leitrim



Boyle





Carroll Joinery are the only manufacturer of Moulded Panel Doors in Ireland. For years we have produced them at our factory in Ballintaggart, Co Kilkenny.

These doors are made to the highest standards of quality and reliability. They are available as light non-fire doors, as well as solid 30 minute fire doors.

Moulded Panel Doors



Colonist Smooth



Coventry Smooth
or Woodgrain



Carrera Smooth



Clermont Woodgrain




Quattro





This is our latest range of doors which combines traditional design with a modern style and finish.

Designer Doors



Carbury



Castletown



Bunclody



Borris



Foxford



Kinsale



Roscrea



Kenmare



Clonakilty



Merrion



Avoca



Bantry



This stylish contemporary door design comes with square edged framing and in its simplicity is ideally suited with both streamlined and stylish contemporary interior home designs. The shaker style comes with a single solid panel or 4 solid panels and can be glazed also. We can offer doors prehung in frame with locks and architraves.

Shaker Doors



Ardree



Collon



Dunleer



Duleek



Ashborne



Clane



Enfield




Lusk




This stylish contemporary MDF faced and laminate door is manufactured to the highest standards. Its simplistic design makes it suited with both streamlined and stylish contemporary interior home and office designs. Doors are 44mm thick with solid core construction available in half hour fire rated (FD30) and 54mm thick one hour rated (FD60) also. Doors can come prefinished also. Door sizes are made to order.

Flush Doors

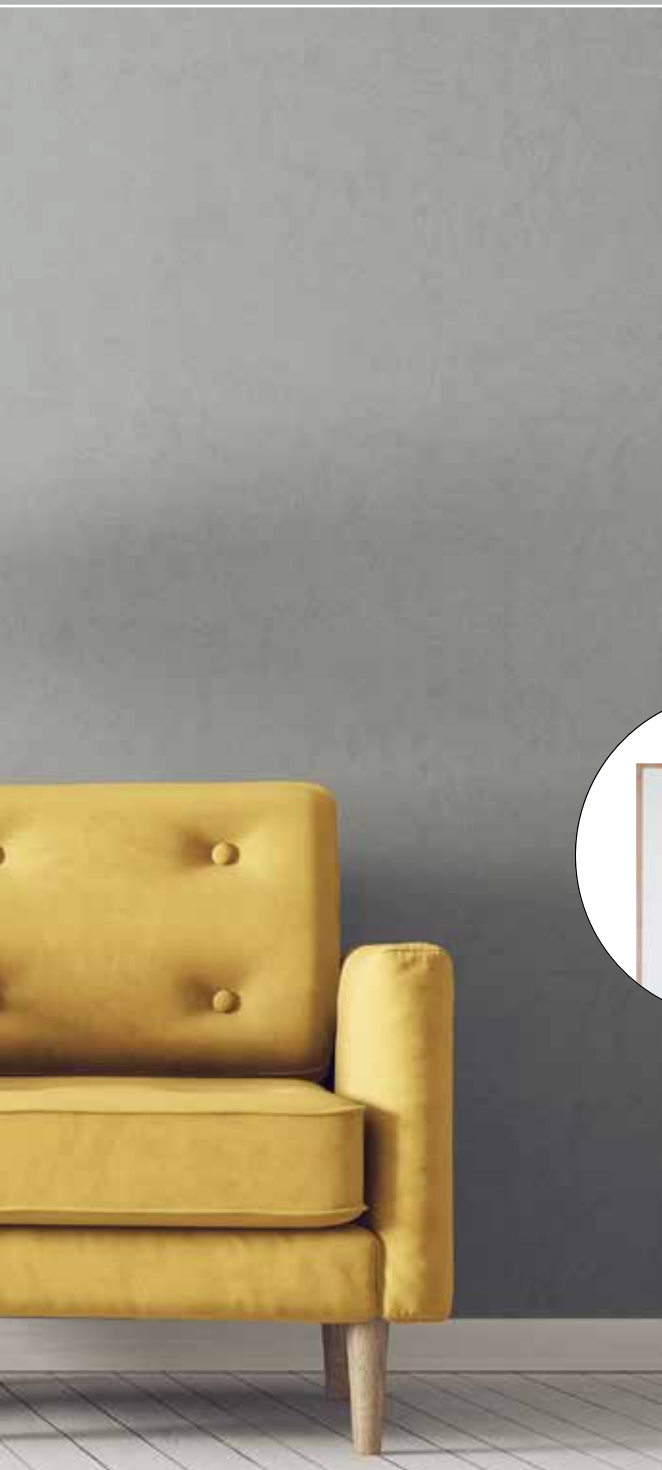

Primaseal



Laminate






This stylish contemporary wood veneered door is manufactured to the highest standards. Its simplistic design makes it suited with both streamlined and stylish contemporary interior home and office designs. Doors are 44mm thick with solid core construction available in half hour fire rated (FD30) and 54mm thick one hour rated (FD60) also. Veneers are available in white oak, walnut, ash, cherry, paint finish and other veneer types upon request. We can offer doors prehung in frames with locks and architraves. Door sizes are made to order.

Veneer Doors



Oak Herringbone 




Ash 



Wenge 



Steamed Beech 



Walnut 




White Oak 



Innova Oak 



Innova Cherry 




Cherry 

AVAILABLE AS A PRE-HUNG DOORSET

Handles

Euro 1069

Handle Collection

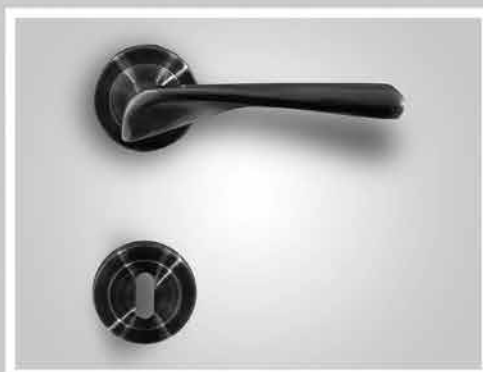

Rimini



Jin Moher SC/PC



Euro 157 PC



Jin Clara SC/AB



Euro K918

Stairs



Stairs



A Series



C Series



D Series



SC Series

Newel Tops



Available in

- Oak
- Walnut
- Red Deal
- Teak
- Mahogany
- Ash

Strings, Treads, Risers
All Timber

More profiles available to order

Balustrades



A Series



C Series



D Series




SC Series



'P' Shaped



'U' Shaped



Circular

Handrails

Mouldings

Square



Bullnosed



Ogee Mould



Chamfered



Groove & Chamfered



STANDARD SIZES ARCHITRAVE

50 x 18mm

70 x 18mm

95 x 18mm

STANDARD SIZES SKIRTING

95 x 18mm

120 x 18mm


Range of MDF, Primed Skirtings & Architraves also available to order.

Other Mouldings available upon request.

VT Style




2 Part Architrave

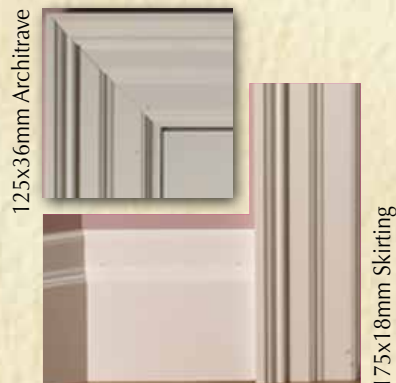

Red Oak Ogee

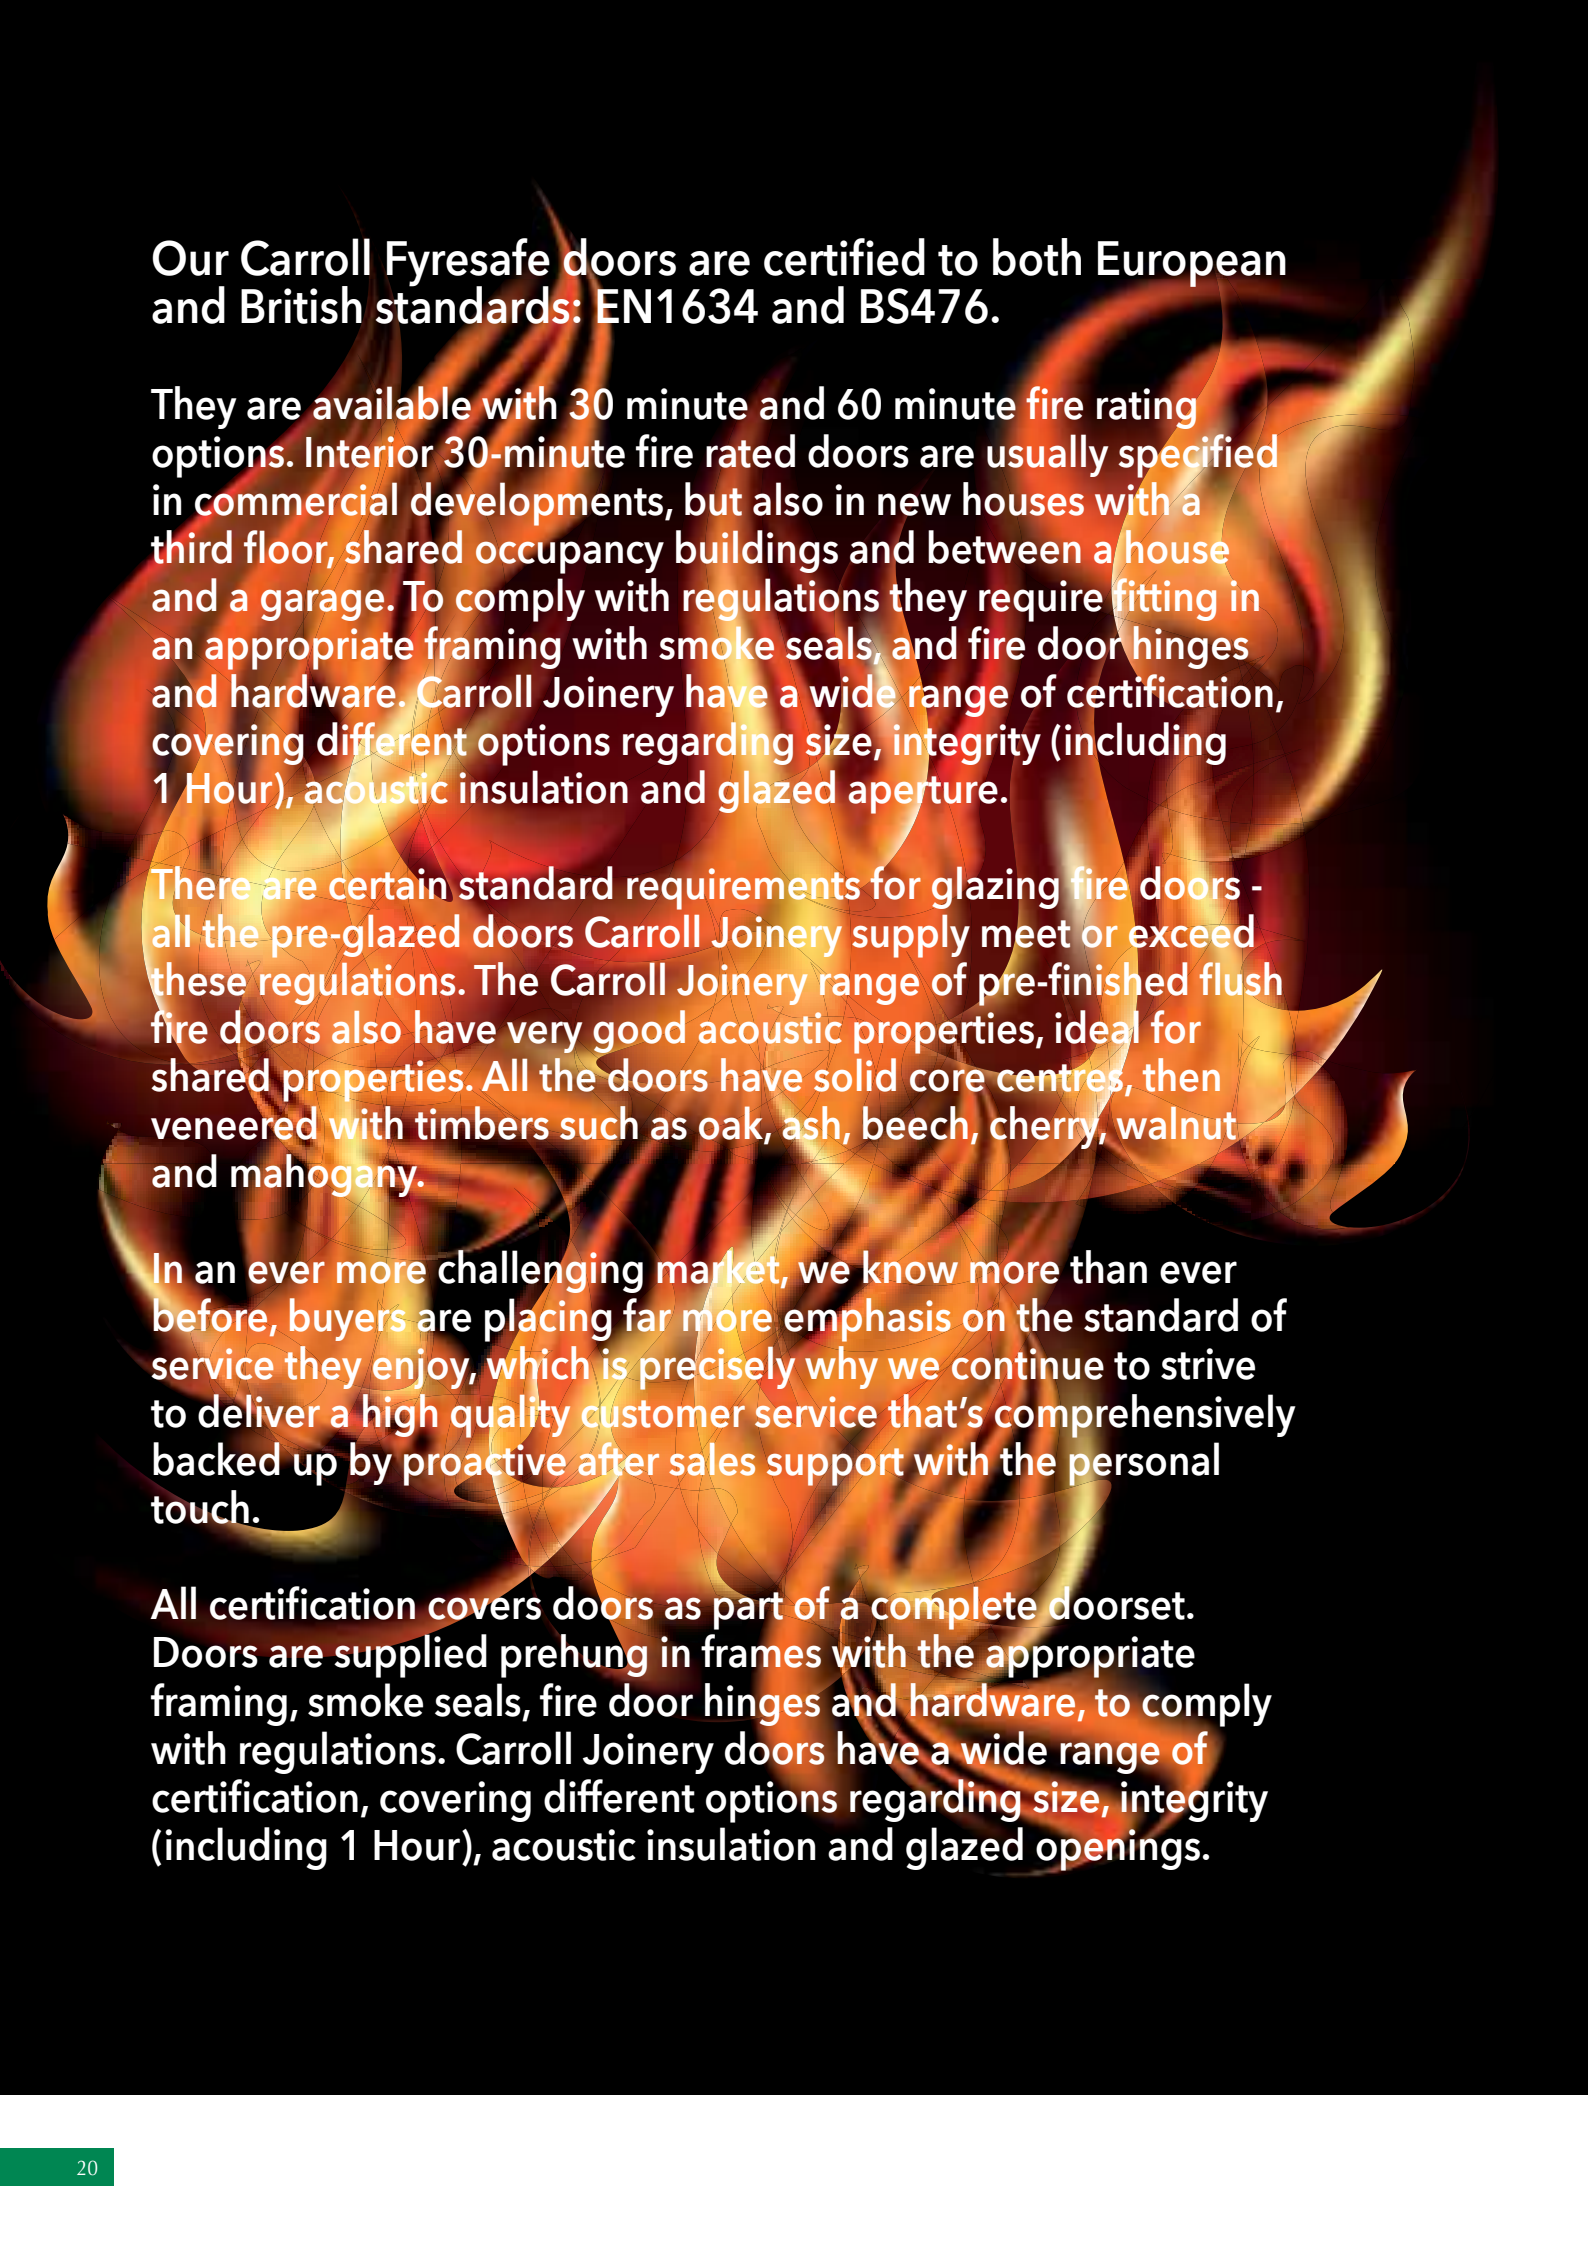

The background of the entire page is a stylized, high-contrast image of flames. The flames are depicted in shades of orange, yellow, and red, with black outlines and a dark, smoky background. The flames appear to be rising and swirling, creating a sense of movement and heat. The overall effect is dramatic and emphasizes the fire safety theme of the text.

Our Carroll Fyresafe doors are certified to both European and British standards: EN1634 and BS476.

They are available with 30 minute and 60 minute fire rating options. Interior 30-minute fire rated doors are usually specified in commercial developments, but also in new houses with a third floor, shared occupancy buildings and between a house and a garage. To comply with regulations they require fitting in an appropriate framing with smoke seals, and fire door hinges and hardware. Carroll Joinery have a wide range of certification, covering different options regarding size, integrity (including 1 Hour), acoustic insulation and glazed aperture.

There are certain standard requirements for glazing fire doors - all the pre-glazed doors Carroll Joinery supply meet or exceed these regulations. The Carroll Joinery range of pre-finished flush fire doors also have very good acoustic properties, ideal for shared properties. All the doors have solid core centres, then veneered with timbers such as oak, ash, beech, cherry, walnut and mahogany.

In an ever more challenging market, we know more than ever before, buyers are placing far more emphasis on the standard of service they enjoy, which is precisely why we continue to strive to deliver a high quality customer service that's comprehensively backed up by proactive after sales support with the personal touch.

All certification covers doors as part of a complete doorset. Doors are supplied prehung in frames with the appropriate framing, smoke seals, fire door hinges and hardware, to comply with regulations. Carroll Joinery doors have a wide range of certification, covering different options regarding size, integrity (including 1 Hour), acoustic insulation and glazed openings.

INSTALLATION OF INTERNAL DOORS - FOR RENOVATION AND NEW BUILD



YOU WILL HAVE PROBLEMS IF YOU:

- STORE DOORS IN HUMID CONDITIONS
- HANG DOORS IN NEWLY PLASTERED ROOMS
- SEAL UP HOUSES AFTER DOORS ARE INSTALLED
- TEST CENTRAL HEATING WITHOUT VENTILATION
- DO NOT SEAL BOTH FACES AND ALL 4 EDGES BEFORE HANGING

Building site conditions are considerably wetter in winter than summer. Satisfactory building practices in summer are not suitable for winter. Doors must always be sealed prior to exposure to moisture all year, it is especially vital to do so in winter.

STORAGE

Doors, like all timber-based materials are hygroscopic and therefore will absorb and indeed attract moisture from damp air and in humid conditions expand. In extreme conditions this can also result in the doors distorting excessively. If badly distorted, doors rarely return to normal when they dry out. Doors must be stored in dry conditions flat on battens of even thickness. If the doors are delivered shrink wrapped then they should be left wrapped until immediately prior to sealing / painting. Doors should not be stored in direct contact with the floor and should not be introduced to the project before plastering is finished and fully dry.

INSTALLATION / HANGING

Care must be taken to ensure that doors are not installed until plaster work is dry, in winter this may take several weeks. When doors are installed good ventilation is vital to prevent the humidity inside rising to an unacceptable level. At night as the temperature drops humidity inside rises dramatically and doors will absorb moisture.

VENTILATION

Windows should be left open to ensure a good circulation of air through the house both during day and night. In excessively damp conditions distortion will occur within hours of the door being installed or exposed to humidity. Doors should be left half open at all times to ensure that conditions on both sides of the door are similar. If a room is sealed by a closed door, or the door so far that it is close to wet plaster, conditions on each side of the door will be different and this will rapidly cause the door to warp.

CENTRAL HEATING

If central heating is tested after the doors are installed it is especially important that good ventilation is maintained during and after. Testing central heating drives moisture out of the walls and as the temperature in the house falls the moisture in the air can condense on the door causing it to distort.

DECORATING-SEALING-HANGING

It is vital that the purchaser ensures that at least 3 coats of good quality wood finish, stain, varnish should be applied to the door immediately the wrapper is removed and before hanging or exposure to humidity. All 6 sides must be thoroughly sealed. All cut-outs for locks, hinges etc should also be sealed. It is extremely important to ensure that all door joints, especially the horizontals are given special attention, ensuring that the protective surface coatings are worked into the joints. Natural sealer is popular and recommended.

STAINING

The colour of the door will be altered by the application of a wood stain prior to applying the sealing coats. Alternatively tinted sealing coats can achieve a tinted effect if desired.

SIZES AVAILABLE IN DOORS

2032 x 864mm	(6'8" x 2'10")	2040 x 926*
2032 x 813mm	(6'8" x 2'8")	2040 x 826*
1981 x 762mm	(6'6" x 2'6")	2040 x 726*
1981 x 711mm	(6'6" x 2'4")	2040 x 626*
1981 x 660mm	(6'6" x 2'2")	2040 x 526*
1981 x 610mm	(6'6" x 2'0")	

**Only Available in Veneered and Plywood Ranges.*

Please Note - wood is a natural product. There can be colour variations in timber, thus we can not guarantee colour consistency. It is the customers responsibility to check the colour variants and ensure they are happy with the tones, before the door is altered from the shop state. Doors can not be exchanged once they are altered from original purchase state.

If a door is deemed to be faulty, the company will accept responsibility for replacement of the door only, upon agreement. No other associate costs will be incurred by the company.



All our wood is harvested from
sustainable renewable forests



Sales Office:

Bluebell Industrial Estate,
Bluebell Avenue, Dublin 12.
Phone +353 (0)1 4051111

Factory:

Ballintaggart, Callan, Co Kilkenny.
Phone +353 (0)52 9154122

Email: info@carrolljoinery.ie
www.carrolljoinery.ie

